




**LED LIGHT POWER SUPPLY
C091D- 150-Series Power
Supply**

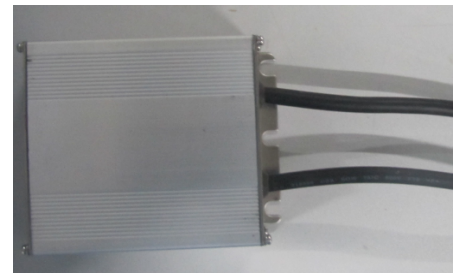

ITEM	Parameter	Note
Voltage Input	AC120/277V	
Current Input	2.0A(max)	
Frequency	47-63HZ	
Voltage Output	DC150-400V	LED number and VF value
Current Output terminal	350-1000mA	Increasing at 10mA increment
Power Output	150W(max)	
Current Accuracy	<±5%	
PF Value	≥0.95	Under full load and rated voltage [230VAC]
THD	<15%	
Efficiency	≥92%	
Dimmng Feature (Optional)	DALI Control Interface	Light output:0-100%
	RS485 Control Interface	Light output:0-100%
	Analog(0-10V) Control Interface	Light output:0-100%
	PWM Dimming Control Interface	Ligh toutput:0-100%
Operating Temperature	-40℃~55℃	
Storage Temperature	-50℃~80℃	
IP Rating	IP66	
Grounding Resistance	<0.1Ω 40A/2Min	
Immunity	Surge: L-N 2kv;L-PE 4KV;N-PE 4KV,L,N-PE 4KV	
Isolation Resistance	>50MΩ	Against the housing(Ground)
Certificate	ETL	
Withstand Voltage	1500VAC(or 2121VDC)1min (between input and ground) 1500VAC(or 2121VDC)1min (between input and output) 500VAC 1min (between output and ground)	Current leaking<3.5mA