
Specifications Bolt Down Aluminum Fluted Poles



ade in USA	



Project Name:

Quantity: Pole Type:

Customer:

Material:

Specifications

Aluminum shaft is 6060-T6 extruded aluminum. Base plate is A356 cast aluminum.

Mounting:

Anchor bolts are hot-dipped galvanized steel, ASTM F1554 Grade 55. Bolt projection is 3" to 3-1/2"

All poles are provided with a hand hole and gasketed cover,18" standard location. Tamper-proof screw is optional. 5/16-18 grounding lug located back side of hand hole.

Bolt Covers: 1-piece Spun Aluminum Bolt Cover for 3" shaft only. 2-piece split bolt cover for all other steel poles.

Banner Arms.

Multiple styles of Banner Arms are available. Please consult factory regarding maximum banner size based on the wind velocity in your location.

Other accessories:

GFI receptacles, ladder rests, signage, flagpole holder.

Finish:
A polyester powder coat high quality finish. Marine grade finish is available.

Modifications:

Consult factory for custom or modified designs.

Buy American:

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS, and DOT regulations. Click here for additional information.




Catalog Number	1	2	3	4
	BD3F6.125		_	_

ACCESSORIES

1 ITEM NUMBER	OD	LENGTH	WALL	80 MPH	90 MPH	100 MPH	110 MPH
BD3F6	3	6	0.125	6.60	5.20	3.80	2.23
BD3F7	3	7	0.125	5.90	4.60	3.30	1.73
BD3F8	3	8	0.125	5.30	4.15	3.00	1.43
BD3F9	3	9	0.125	4.60	3.55	2.50	0.93
BD3F10	3	10	0.125	3.90	2.95	2.00	
BD3F11	3	11	0.125	2.90	2.50	1.75	
BD3F12	3	12	0.125	1.50	2.00	1.10	
BD4F8	4	8	0.188	16.00	11.65	7.30	5.73
BD4F9	4	9	0.188	14.40	10.50	6.60	5.03
BD4F10	4	10	0.188	12.80	9.35	5.90	4.33
BD4F11	4	11	0.188	11.50	8.30	5.10	3.53
BD4F12	4	12	0.188	10.50	7.50	4.50	2.93
BD4F13	4	13	0.188	7.90	5.70	3.50	1.93
BD4F14	4	14	0.188	5.10	3.80	2.50	0.93
BD4F15	4	15	0.188	4.70	3.35	2.00	
BD4F16	4	16	0.188	3.50	2.63	1.75	
BD4F17	4	17	0.188	2.50	1.85	1.20	
BD4F18	4	18	0.188	1.90	1.43	0.95	
BD5F8	5	8	0.188	20.21	17.51	14.80	13.23
BD5F9	5	9	0.188	18.50	15.58	12.65	11.08
BD5F10	5	10	0.188	17.00	13.85	10.70	9.13
BD5F11	5	11	0.188	15.50	12.55	9.60	8.03
BD5F12	5	12	0.188	14.00	11.25	8.50	6.93
BD5F13	5	13	0.188	12.60	10.15	7.70	6.13
BD5F14	5	14	0.188	11.20	9.10	7.00	5.43
BD5F15	5	15	0.188	10.00	8.15	6.30	4.73
BD5F16	5	16	0.188	8.90	7.25	5.60	4.03
BD5F17	5	17	0.188	7.70	6.40	5.10	3.53
BD5F18	5	18	0.188	6.50	5.63	4.75	3.18
BD5F19	5	19	0.188	5.10	4.15	3.20	1.63
BD5F20	5	20	0.188	3.80	2.45	1.10	

BDC3 (Bolt Down Cover 3")
BDC4 (Bolt Down Cover 4")
BDC5 (Bolt Down Cover 5")
SBDC3 (Split Bolt Down Cover 3")
SBDC4 (Split Bolt Down Cover 4")
SBDC5 (Split Bolt Down Cover 5")
IBOLT (Eye Bolt)
GFI20 (20 Amp GFCI Receptacle Outlet*)
GFI-WPU (20 Amp GFCI Receptacle with Weather-proof while-in-use cover*)
EXTB-3 Extension Box for GFI, 3" Pole
EXTB-4 Extension Box for GFI, 4" Pole
EXTB-5 Extension Box for GFI, 5" Pole
TP Tamper-Proof Screw (Handhole)
VD 2nd Mode Vibration Damper, Internally mounted
*Please advise mounting height & orientation. Examples: @2'-6" & same side as hand hole (0°) @6'-6" & to the right of hand hole (90°) @2'-6" & to the rear of hand hole (180°) @2'-6" & to the left of hand hole (270°)
\otimes







Specifications Bolt Down Aluminum Fluted Poles

Project Name:		
Pole Type:	Quantity:	
Customor		

2-PIECE CLAMSHELLS CCS0300 CCS0509 CCS0701 CCS0702 CCS0900 CCS1100 CCS1201 CCS1301 CCS1302 CCS1502 CCS1504 CCS1509 CCS1607 CCS1608 CCS1607 CCS1608 CCS1902 CCS2902 CCS2903 CCS5301 CCS5509 CCS6303 CCS6502 CCS9103 CCS6502		
CCS0509 CCS0701 CCS0702 CCS0900 CCS1100 CCS1201 CCS1301 CCS1302 CCS1501 CCS1502 CCS1504 CCS1509 CCS1607 CCS1608 CCS1902 CCS2902 CCS2901 CCS5301 CCS5301 CCS5509 CCS6303 CCS6502 CCS6502	3	2-PIECE CLAMSHELLS
CCS0701 CCS0702 CCS0900 CCS1100 CCS1201 CCS1301 CCS1302 CCS1501 CCS1502 CCS1504 CCS1509 CCS1607 CCS1608 CCS1902 CCS2902 CCS2903 CCS5301 CCS5301 CCS5509 CCS6303 CCS6502 CCS9103	CCS0300	
CCS0702 CCS0900 CCS1100 CCS1201 CCS1301 CCS1302 CCS1501 CCS1502 CCS1504 CCS1509 CCS1607 CCS1608 CCS1902 CCS2902 CCS2903 CCS5301 CCS5401 CCS5509 CCS6303 CCS6502 CCS9103	CCS0509	
CCS0900 CCS1100 CCS1201 CCS1301 CCS1302 CCS1501 CCS1502 CCS1504 CCS1509 CCS1607 CCS1608 CCS1902 CCS2902 CCS2903 CCS5301 CCS5401 CCS5509 CCS6303 CCS6502 CCS9103	CCS0701	
CCS1100 CCS1201 CCS1301 CCS1302 CCS1501 CCS1502 CCS1504 CCS1509 CCS1607 CCS1608 CCS1902 CCS2902 CCS2901 CCS5301 CCS5301 CCS5509 CCS6303 CCS6502 CCS6502	CCS0702	
CCS1201 CCS1301 CCS1302 CCS1501 CCS1502 CCS1504 CCS1509 CCS1607 CCS1608 CCS1902 CCS2902 CCS2901 CCS5301 CCS5301 CCS5509 CCS6303 CCS6502 CCS9103	CCS0900	
CCS1301 CCS1302 CCS1501 CCS1502 CCS1504 CCS1509 CCS1607 CCS1608 CCS1902 CCS2902 CCS2901 CCS5301 CCS5301 CCS5509 CCS6303 CCS6502 CCS9103	CCS1100	
CCS1302 CCS1501 CCS1502 CCS1504 CCS1509 CCS1607 CCS1608 CCS1902 CCS2902 CCS2903 CCS5301 CCS5401 CCS5509 CCS6303 CCS6502 CCS9103	CCS1201	
CCS1501 CCS1502 CCS1504 CCS1509 CCS1607 CCS1608 CCS1902 CCS2902 CCS2903 CCS5301 CCS5401 CCS5509 CCS6303 CCS6502 CCS9103	CCS1301	
CCS1502 CCS1504 CCS1509 CCS1607 CCS1608 CCS1902 CCS2902 CCS2903 CCS5301 CCS5401 CCS5509 CCS6303 CCS6502 CCS9103	CCS1302	
CCS1504 CCS1509 CCS1607 CCS1608 CCS1902 CCS2902 CCS2903 CCS5301 CCS5509 CCS6303 CCS6502 CCS9103	CCS1501	
CCS1509 CCS1607 CCS1608 CCS1902 CCS2902 CCS2903 CCS5301 CCS5401 CCS5509 CCS6303 CCS6502 CCS9103	CCS1502	
CCS1607 CCS1608 CCS1902 CCS2902 CCS2903 CCS5301 CCS5401 CCS5509 CCS6303 CCS6502 CCS9103	CCS1504	
CCS1608 CCS1902 CCS2902 CCS2903 CCS5301 CCS5401 CCS5509 CCS6303 CCS6502 CCS9103	CCS1509	
CCS1902 CCS2902 CCS2903 CCS5301 CCS5401 CCS5509 CCS6303 CCS6502 CCS9103	CCS1607	
CCS2902 CCS2903 CCS5301 CCS5401 CCS5509 CCS6303 CCS6502	CCS1608	
CCS2903 CCS5301 CCS5401 CCS5509 CCS6303 CCS6502	CCS1902	
CCS5301 CCS5401 CCS5509 CCS6303 CCS6502 CCS9103	CCS2902	
CCS5401 CCS5509 CCS6303 CCS6502 CCS9103	CCS2903	
CCS5509 CCS6303 CCS6502 CCS9103	CCS5301	
CCS6303 CCS6502 CCS9103	CCS5401	
CCS6502 CCS9103	CCS5509	
CCS9103	CCS6303	
	CCS6502	
CSCS9200	CCS9103	
	CSCS9200	

ANPlighting.com

FINISHES *Premium and Marine Grade Finish have additional charges						
Standard Colors	Standard Grade		Standard Colors	Standard Grade	9	
Aspen Green	10	10M	Copper Clay	53	53M	
Cantaloupe	11	11M	Silver	56	56M	
Lilac	12	12M	Black Verde	61	61M	
Putty	13	13M	Painted Chrome	70	70M	
Raw Unfinished	40	NA	Painted Copper	71	71M	
Black	41	41M	Textured Black	72	72M	
Forest Green	42	42M	Matte Black	73	73M	
Bright Red	43	43M	Textured Archi- tectural Bronze	76	76M	
White	44	44M	Textured White	77	77M	
Bright Blue	45	45M	Textured Silver	78	78M	
Sunny Yellow	46	46M	PREMIUM FINISH	Premium Grade*	Marine Grade*	
Aqua Green	47	47M	Textured Desert	80	80M	
Galvanized	49	NA	Graystone	82	82M	
Navy	50	50M	Oil Rubbed Bronze	83	83M	
Architectural Bronze	51	51M	Carbon Graphite	96	96M	
Patina Verde	52	52M				
Consult Factory for additional paint charges and availability.						

TOP
OT (Open Top)
OTPC (Open Top, includes flat Pole Cap)
OM (Other Mounting (please define)
TN (Ø2-3/8" x 4" Tenon)

FINISHES

- A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion. 5-year warranty for aluminum products. 2-year warranty for steel products.
- Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3,000 hours of continuous salt spray, comes with a 2-year warranty and is available in either a textured or gloss surface.

WARRANTY See $\underline{www.ANPlighting.com}$ for complete fixture warranty. LED warranty information · 5 year limited warranty*








Project Name:		
Pole Type:	Quantity:	
Customer:		

ADDITIONAL ACCESSORIES

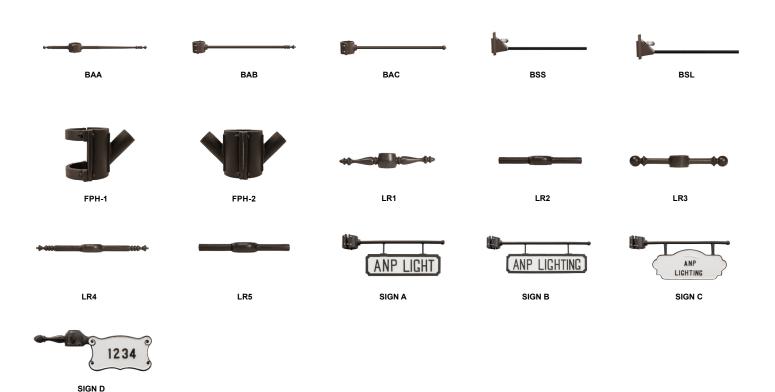

2-PIECE CLAMSHELLS

