


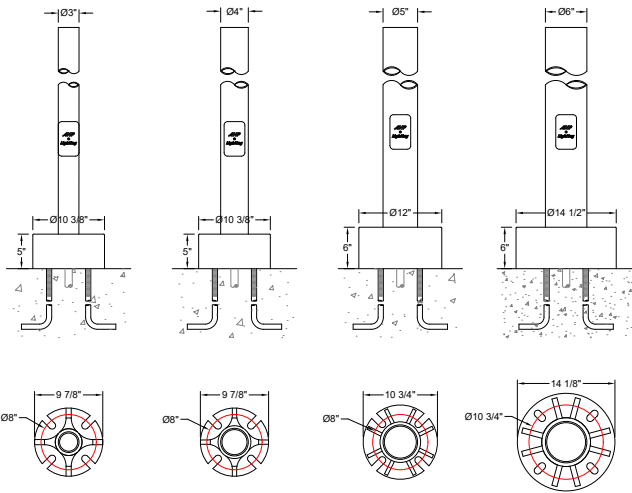

Project Name: _____

Pole Type: _____ Quantity: _____

Customer: _____

Specifications**Material:**

Aluminum shaft is 6060-T6 extruded aluminum.
Base plate is A356 cast aluminum.

Mounting:

Anchor bolts are hot-dipped galvanized steel, ASTM F1554 Grade 55. Bolt projection is 3" to 3-1/2"

Access:

All poles are provided with a hand hole and gasketed cover, 18" standard location. Tamper-proof screw is optional. 5/16-18 grounding lug located back side of hand hole.

Bolt Covers:

1-piece Spun Aluminum Bolt Cover or 2-piece Split Aluminum Bolt Cover. 2-piece bolt covers are required if for use with GFI outlets and other accessories.

Banner Arms:

Multiple styles of Banner Arms are available. Please consult factory regarding maximum banner size based on the wind velocity in your location.

Other accessories:

GFI receptacles, ladder rests, signage, flagpole holder.

Finish:

A polyester powder coat high quality finish. Marine grade finish is available.

Modifications:

Consult factory for custom or modified designs.

Buy American:

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS, and DOT regulations. [Click here for additional information.](#)

Catalog Logic**Catalog Number**

1

2

3

4

BD3S10.125

1	ITEM NUMBER	OD	LENGTH	WALL	80 MPH	90 MPH	100 MPH	110 MPH
	BD3S8	3	8	0.125	12.05	9.31	7.38	5.96
	BD3S9	3	9	0.125	9.65	7.39	5.80	4.64
	BD3S10	3	10	0.125	7.69	5.81	4.50	3.55
	BD3S11	3	11	0.125	6.04	4.48	3.40	2.63
	BD3S12	3	12	0.125	4.62	3.34	2.46	1.83
	BD3S13	3	13	0.125	3.38	2.33	1.62	1.12
	BD3S14	3	14	0.125	2.27	1.42	0.87	
	BD3S15	3	15	0.125	1.27	0.60		
	BD3S8	3	8	0.188	18.23	14.19	11.33	9.23
	BD3S9	3	9	0.188	15.01	11.62	9.23	4.48
	BD3S10	3	10	0.188	12.40	9.54	7.52	6.05
	BD3S11	3	11	0.188	10.24	7.80	6.09	4.85
	BD3S12	3	12	0.188	8.41	6.33	4.88	3.83
	BD3S13	3	13	0.188	6.81	5.04	3.81	2.94
	BD3S14	3	14	0.188	5.41	3.90	2.87	2.14
	BD3S15	3	15	0.188	4.15	2.89	2.03	1.43
	BD3S16	3	16	0.188	3.02	1.96	1.26	
	BD3S17	3	17	0.188	1.98	1.11		
	BD3S18	3	18	0.188	1.02			
	BD4S8	4	8	0.125	24.95	19.52	15.66	12.82
	BD4S9	4	9	0.125	20.90	16.30	13.03	10.63
	BD4S10	4	10	0.125	17.66	13.71	10.92	8.87
	BD4S11	4	11	0.125	14.99	11.58	9.17	7.41
	BD4S12	4	12	0.125	12.75	9.78	7.70	6.18
	BD4S13	4	13	0.125	10.82	8.24	6.43	5.11
	BD4S14	4	14	0.125	9.14	6.89	5.31	4.18
	BD4S15	4	15	0.125	7.65	5.69	4.32	3.34
	BD4S16	4	16	0.125	6.32	4.61	3.43	2.59
	BD4S17	4	17	0.125	5.12	3.36	2.62	1.91
	BD4S18	4	18	0.125	4.02	2.74	1.88	1.28
	BD4S19	4	19	0.125	3.00	1.91	1.19	0.70
	BD4S20	4	20	0.125	2.06	1.14		
	BD4S21	4	21	0.125	1.18			
	BD4S8	4	8	0.188	36.92	28.98	23.32	19.15
	BD4S9	4	9	0.188	31.28	24.50	19.67	16.12
	BD4S10	4	10	0.188	26.80	20.93	16.77	13.70
	BD4S11	4	11	0.188	23.13	18.01	14.38	11.72
	BD4S12	4	12	0.188	20.08	15.57	12.39	10.05
	BD4S13	4	13	0.188	17.47	13.49	10.68	8.63
	BD4S14	4	14	0.188	15.22	11.69	9.20	7.39
	BD4S15	4	15	0.188	13.25	10.10	7.90	6.30
	BD4S16	4	16	0.188	11.49	8.70	6.74	5.33
	BD4S17	4	17	0.188	9.92	7.43	5.70	4.45
	BD4S18	4	18	0.188	8.50	6.28	4.75	3.65
	BD4S19	4	19	0.188	7.20	5.23	3.88	2.92
	BD4S20	4	20	0.188	6.01	4.26	3.07	2.24
	BD5S8	5	8	0.125	41.60	32.69	26.34	21.65
	BD5S9	5	9	0.125	35.39	27.76	22.32	18.32
	BD5S10	5	10	0.125	30.46	23.84	19.13	15.67


ITEM NUMBER	OD	LENGTH	WALL	80 MPH	90 MPH	100 MPH	110 MPH
BD5S11	5	11	0.125	26.45	20.65	16.53	13.50
BD5S12	5	12	0.125	23.10	17.98	14.35	11.69
BD5S13	5	13	0.125	20.27	15.72	12.50	10.15
BD5S14	5	14	0.125	17.83	13.77	10.91	8.81
BD5S15	5	15	0.125	15.69	12.06	9.50	7.64
BD5S16	5	16	0.125	13.81	10.55	8.26	6.60
BD5S17	5	17	0.125	12.12	9.19	7.15	5.66
BD5S18	5	18	0.125	10.60	7.97	6.14	4.82
BD5S19	5	19	0.125	9.22	6.85	5.22	4.04
BD5S20	5	20	0.125	7.95	5.83	4.37	3.33
BD5S8	5	8	0.188	61.27	48.23	38.92	32.05
BD5S9	5	9	0.188	52.44	41.23	33.24	27.34
BD5S10	5	10	0.188	45.47	35.70	28.74	23.61
BD5S11	5	11	0.188	39.82	31.21	25.09	20.58
BD5S12	5	12	0.188	35.14	27.50	22.06	18.06
BD5S13	5	13	0.188	31.20	24.35	19.50	15.93
BD5S14	5	14	0.188	27.82	21.66	17.30	14.10
BD5S15	5	15	0.188	24.88	19.32	15.38	12.50
BD5S16	5	16	0.188	22.30	17.26	13.70	11.09
BD5S17	5	17	0.188	20.02	15.43	12.20	9.84
BD5S18	5	18	0.188	17.97	13.79	10.85	8.71
BD5S19	5	19	0.188	16.12	12.31	9.63	7.69
BD5S20	5	20	0.188	14.44	10.95	8.52	6.76
BD6S8	6	8	0.125	62.03	48.84	39.42	32.47
BD6S9	6	9	0.125	53.14	41.79	33.70	27.73
BD6S10	6	10	0.125	46.12	36.23	29.18	23.98
BD6S11	6	11	0.125	40.44	31.71	25.50	20.93
BD6S12	6	12	0.125	35.73	27.98	22.46	18.40
BD6S13	6	13	0.125	31.77	24.82	19.89	16.26
BD6S14	6	14	0.125	28.38	22.12	17.68	14.43
BD6S15	6	15	0.125	25.44	19.78	15.77	12.83
BD6S16	6	16	0.125	22.85	17.72	14.08	11.42
BD6S17	6	17	0.125	20.57	15.89	12.58	10.17
BD6S18	6	18	0.125	18.52	14.25	11.24	9.05
BD6S19	6	19	0.125	16.67	12.77	10.02	8.03
BD6S20	6	20	0.125	14.99	11.42	8.91	7.10
BD6S8	6	8	0.188	75.57	59.53	48.09	39.63
BD6S9	6	9	0.188	64.86	51.05	41.20	33.92
BD6S10	6	10	0.188	56.42	44.36	35.76	29.42
BD6S11	6	11	0.188	49.60	38.95	31.36	25.77
BD6S12	6	12	0.188	43.96	34.47	27.72	22.74
BD6S13	6	13	0.188	39.22	30.71	24.65	20.19
BD6S14	6	14	0.188	35.17	27.48	22.02	18.01
BD6S15	6	15	0.188	31.67	24.69	19.74	16.11
BD6S16	6	16	0.188	28.60	22.25	17.75	14.45
BD6S17	6	17	0.188	25.89	20.08	15.97	12.97
BD6S18	6	18	0.188	23.47	18.15	14.39	11.64
BD6S19	6	19	0.188	21.29	16.40	12.96	10.45
BD6S20	6	20	0.188	19.32	14.82	11.66	9.36

Project Name: _____

Pole Type: _____ Quantity: _____

Customer: _____

2	ACCESSORIES
	BDC3 (Bolt Down Cover 3")
	BDC4 (Bolt Down Cover 4")
	BDC5 (Bolt Down Cover 5")
	BDC6 (Bolt Down Cover 6")
	SBDC3 (Split Bolt Down Cover 3")
	SBDC4 (Split Bolt Down Cover 4")
	SBDC5 (Split Bolt Down Cover 5")
	SBDC6 (Split Bolt Down Cover 6")
	IBOLT (Eye Bolt)
	GFI20 (20 Amp GFCI Receptacle Outlet*)
	GFI-WPU (20 Amp GFCI Receptacle with Weather-proof while-in-use cover*)
	EXTB-3 Extension Box for GFI, 3" Pole
	EXTB-4 Extension Box for GFI, 4" Pole
	EXTB-5 Extension Box for GFI, 5" Pole
	EXTB-6 Extension Box for GFI, 6" Pole
	TP Tamper-Proof Screw (Handhole)
	VD2 2nd Mode Vibration Damper, Internally mounted
	*Please advise mounting height & orientation. Examples: @ 2'-6" & same side as hand hole (0°) @ 6'-6" & to the right of hand hole (90°) @ 2'-6" & to the rear of hand hole (180°) @ 2'-6" & to the left of hand hole (270°)



3	2-PIECE CLAMSHELLS
	CCS0300
	CCS0509
	CCS0701
	CCS0702
	CCS0900
	CCS1100
	CCS1201
	CCS1301
	CCS1302
	CCS1501
	CCS1502
	CCS1504
	CCS1509
	CCS1607
	CCS1608
	CCS1902
	CCS2902
	CCS2903
	CCS5301
	CCS5401
	CCS5509
	CCS6303
	CCS6502
	CCS9103
	CCS9200

4	FINISHES					
	*Premium and Marine Grade Finish have additional charges					
Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Marine Grade*	
Aspen Green	10	10M	Copper Clay	53	53M	
Cantaloupe	11	11M	Silver	56	56M	
Lilac	12	12M	Black Verde	61	61M	
Putty	13	13M	Painted Chrome	70	70M	
Raw Unfinished	40	NA	Painted Copper	71	71M	
Black	41	41M	Textured Black	72	72M	
Forest Green	42	42M	Matte Black	73	73M	
Bright Red	43	43M	Textured Architectural Bronze	76	76M	
White	44	44M	Textured White	77	77M	
Bright Blue	45	45M	Textured Silver	78	78M	
Sunny Yellow	46	46M	PREMIUM FINISH	Premium Grade*	Marine Grade*	
Aqua Green	47	47M	Textured Desert	80	80M	
Galvanized	49	NA	Graystone	82	82M	
Navy	50	50M	Oil Rubbed Bronze	83	83M	
Architectural Bronze	51	51M	Carbon Graphite	96	96M	
Patina Verde	52	52M				
Consult Factory for additional paint charges and availability.						

TOP
OT (Open Top)
OTPC (Open Top, includes flat Pole Cap)
OM (Other Mounting (please define))
TN (Ø2-3/8" x 4" Tenon)

FINISHES

- A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion. 5-year warranty for aluminum products. 2-year warranty for steel products.
- Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3,000 hours of continuous salt spray, comes with a 2-year warranty and is available in either a textured or gloss surface.

WARRANTY

See www.ANPlighting.com for complete fixture warranty.

LED warranty information

- 5 year limited warranty*
- ANPlighting.com

FINISHES COLORS

STANDARD																			
WHITE	TEXTURED WHITE	SILVER	PAINTED CHROME	PAINTED GALVANIZED	PUTTY	TEXTURED SILVER	TEXTURED BLACK	MATTE BLACK	BLACK	BLACK VERDE	PATINA VERDE	FOREST GREEN	AQUA GREEN	ASPEN GREEN	BRIGHT BLUE	NAVY	SUNNY YELLOW	CANTALOUPE	LILAC
BRIGHT RED	PAINTED COPPER	COPPER CLAY	ARCHITECTURAL BRONZE	TEXTURED ARCHITECTURAL BRONZE	TEXTURED DESERT	GRAYSTONE	OIL RUBBED BRONZE	CARBON GRAPHITE											

Project Name: _____

Pole Type: _____ Quantity: _____

Customer: _____

ADDITIONAL ACCESSORIES



BAA



BAB



BAC



BSS



BSL



FPH-1



FPH-2



LR1



LR2



LR3



LR4



LR5



SIGN A



SIGN B



SIGN C



SIGN D

2-PIECE CLAMSHELLS



CCS0300



CCS0509



CCS0701



CCS0702



CCS0900



CCS1100



CCS1201



CCS1301



CCS1302



CCS1501



CCS1502



CCS1504



CCS1509



CCS1606



CCS1607



CCS1608



CCS1902



CCS2902



CCS2903



CCS5301



CCS5401



CCS5509



CCS6303



CCS6502



CCS9103



CCS9200