


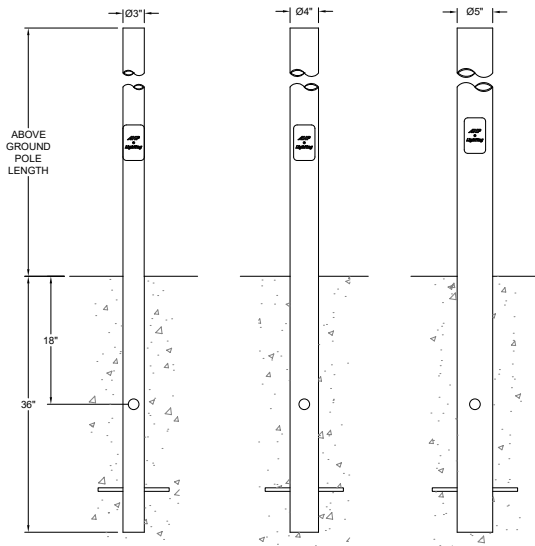

Project Name: _____

Pole Type: _____ Quantity: _____

Customer: _____

Specifications

Material:
Aluminum shaft is 6060-T6 extruded aluminum.

Mounting:
Rated for direct burial in earth or concrete. Please specify above-ground pole length.

Access:
All poles are provided with a hand hole and gasketed cover, 18" standard location. Tamper-proof screws are optional. 5/16-18 grounding lug is located on the back side of hand hole.

Banner Arms:
Multiple styles of Banner Arms are available. Please consult factory regarding maximum banner size based on the wind velocity in your location.

Other accessories:
GFI receptacles, ladder rests, signage, flagpole holder.

Finish:
A polyester powder coat high quality finish. Marine grade finish is available.

Modifications:
Consult factory for custom or modified designs.

Buy American:
This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS, and DOT regulations. [Click here for additional information.](#)

Catalog Logic

BD3F6.125 - GFI - CCS1902 - 41

Pole Accessory Clamshell Finish

Catalog Number

1 2 3 4

BD3F6.125 — —

1	ITEM NUMBER	OD	LENGTH	WALL	80 MPH	90 MPH	100 MPH	110 MPH	120 MPH	130 MPH	140 MPH	150 MPH
	DB3S8	3	8	0.125	12.05	9.31	7.38	5.96	4.90	4.09	3.45	2.94
	DB3S9	3	9	0.125	9.65	7.39	5.80	4.64	3.78	3.12	2.60	2.20
	DB3S10	3	10	0.125	7.69	5.81	4.50	3.55	2.85	2.32	1.90	1.58
	DB3S11	3	11	0.125	6.04	4.48	3.40	2.63	2.06	1.63	1.30	1.05
	DB3S12	3	12	0.125	4.62	3.34	2.46	1.83	1.38			
	DB3S13	3	13	0.125	3.38	2.33	1.62	1.12				
	DB3S14	3	14	0.125	2.27	1.42	0.87					
	DB3S15	3	15	0.125	1.27	0.60						
	DB3S8	3	8	0.188	18.23	14.19	11.33	9.23	7.65	6.43	5.47	4.70
	DB3S9	3	9	0.188	15.01	11.62	9.23	4.48	6.16	5.15	4.35	3.72
	DB3S10	3	10	0.188	12.40	9.54	7.52	6.05	4.95	4.10	3.44	2.92
	DB3S11	3	11	0.188	10.24	7.80	6.09	4.85	3.93	3.23	2.68	2.24
	DB3S12	3	12	0.188	8.41	6.33	4.88	3.83	3.06	2.47	2.02	1.66
	DB3S13	3	13	0.188	6.81	5.04	3.81	2.94	2.29	1.81	1.44	1.15
	DB3S14	3	14	0.188	5.41	3.90	2.87	2.14	1.61			
	DB3S15	3	15	0.188	4.15	2.89	2.03	1.43				
	DB3S16	3	16	0.188	3.02	1.96	1.26					
	DB3S17	3	17	0.188	1.98	1.11						
	DB4S8	4	8	0.125	24.95	19.52	15.66	12.82	10.68	9.01	7.70	6.65
	DB4S9	4	9	0.125	20.90	16.30	13.03	10.63	8.82	7.43	6.32	5.44
	DB4S10	4	10	0.125	17.66	13.71	10.92	8.87	7.33	6.14	5.21	4.46
	DB4S11	4	11	0.125	14.99	11.58	9.17	7.41	6.09	5.08	4.28	3.65
	DB4S12	4	12	0.125	12.75	9.78	7.70	6.18	5.04	4.17	3.49	2.96
	DB4S13	4	13	0.125	10.82	8.24	6.43	5.11	4.14	3.39	2.81	2.35
	DB4S14	4	14	0.125	9.14	6.89	5.31	4.18	3.34	2.70	2.21	1.82
	DB4S15	4	15	0.125	7.65	5.69	4.32	3.34	2.62	2.08	1.66	1.34
	DB4S16	4	16	0.125	6.32	4.61	3.43	2.59	1.98	1.52	1.17	0.90
	DB4S17	4	17	0.125	5.12	3.36	2.62	1.91	1.39	1.01	0.72	
	DB4S8	4	8	0.188	36.92	28.98	23.32	19.15	15.99	13.55	11.61	10.05
	DB4S9	4	9	0.188	31.28	24.50	19.67	16.12	13.44	11.36	9.71	8.39
	DB4S10	4	10	0.188	26.80	20.93	16.77	13.70	11.39	9.60	8.19	7.06
	DB4S11	4	11	0.188	23.13	18.01	14.38	11.72	9.71	8.16	6.94	5.97
	DB4S12	4	12	0.188	20.08	15.57	12.39	10.05	8.30	6.95	5.89	5.04
	DB4S13	4	13	0.188	17.47	13.49	10.68	8.63	7.09	5.91	4.98	4.24
	DB4S14	4	14	0.188	15.22	11.69	9.20	7.39	6.04	5.00	4.19	3.55
	DB4S15	4	15	0.188	13.25	10.10	7.90	6.30	5.11	4.20	3.49	2.93
	DB4S16	4	16	0.188	11.49	8.70	6.74	5.33	4.28	3.48	2.86	2.38
	DB4S17	4	17	0.188	9.92	7.43	5.70	4.45	3.53	2.83	2.29	1.87
	DB5S8	5	8	0.125	41.60	32.69	26.34	21.65	18.10	15.35	13.17	11.42
	DB5S9	5	9	0.125	35.39	27.76	22.32	18.32	15.29	12.94	11.09	9.60
	DB5S10	5	10	0.125	30.46	23.84	19.13	15.67	13.05	11.03	9.43	8.14
	DB5S11	5	11	0.125	26.45	20.65	16.53	13.50	11.22	9.45	8.06	6.95
	DB5S12	5	12	0.125	23.10	17.98	14.35	11.69	9.69	8.14	6.92	5.94
	DB5S13	5	13	0.125	20.27	15.72	12.50	10.15	8.38	7.01	5.94	5.09
	DB5S14	5	14	0.125	17.83	13.77	10.91	8.81	7.24	6.04	5.09	4.34
	DB5S15	5	15	0.125	15.69	12.06	9.50	7.64	6.25	5.18	4.34	3.68
	DB5S16	5	16	0.125	13.81	10.55	8.26	6.60	5.36	4.41	3.68	3.09
	DB5S17	5	17	0.125	12.12	9.19	7.15	5.66	4.56	3.72	3.07	2.56
	DB5S8	5	8	0.188	61.27	48.23	38.92	32.05	26.84	22.79	19.59	17.01
	DB5S9	5	9	0.188	52.44	41.23	33.24	27.34	22.87	19.40	16.65	14.45
	DB5S10	5	10	0.188	45.47	35.70	28.74	23.61	19.72	16.71	14.33	12.41
	DB5S11	5	11	0.188	39.82	31.21	25.09	20.58	17.16	14.52	12.43	10.75
	DB5S12	5	12	0.188	35.14	27.50	22.06	18.06	15.04	12.70	10.85	9.37
	DB5S13	5	13	0.188	31.20	24.35	19.50	15.93	13.23	11.15	9.51	8.19
	DB5S14	5	14	0.188	27.82	21.66	17.30	14.10	11.68	9.82	8.35	7.18
	DB5S15	5	15	0.188	24.88	19.32	15.38	12.50	10.33	8.66	7.34	6.29
	DB5S16	5	16	0.188	22.30	17.26	13.70	11.09	9.14	7.63	6.45	5.51
	DB5S17	5	17	0.188	20.02	15.43	12.20	9.84	8.07	6.71	5.65	4.80




2	ACCESSORIES
	IBOLT (Eye Bolt)
	GFI20 (20 Amp GFCI Receptacle Outlet*)
	GFI-WPU (20 Amp GFCI Receptacle with Weather-proof while-in-use cover*)
	EXTB-3 Extension Box for GFI, 3" Pole
	EXTB-4 Extension Box for GFI, 4" Pole
	EXTB-5 Extension Box for GFI, 5" Pole
	TP Tamper-Proof Screw (Handhole)
	VD2 2nd Mode Vibration Damper, internally mounted
	*Please advise mounting height & orientation. Examples: @2'-6" & same side as hand hole (0°) @6'-6" & to the right of hand hole (90°) @2'-6" & to the rear of hand hole (180°) @2'-6" & to the left of hand hole (270°)
3	2-PIECE CLAMSHELLS
	CCS0300
	CCS0509
	CCS0701
	CCS0702
	CCS0900
	CCS1100
	CCS1201
	CCS1302
	CCS1302
	CCS1501
	CCS1502
	CCS1504
	CCS1509
	CCS1607
	CCS1608
	CCS1902
	CCS2902
	CCS2903
	CCS5301
	CCS5401
	CCS5509
	CCS6303
	CCS6502
	CCS9103
	CCS9200

Project Name: _____

Pole Type: _____ Quantity: _____

Customer: _____

4 FINISHES					
*Premium and Marine Grade Finish have additional charges					
Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Marine Grade*
Aspen Green	10	10M	Copper Clay	53	53M
Cantaloupe	11	11M	Silver	56	56M
Lilac	12	12M	Black Verde	61	61M
Putty	13	13M	Painted Chrome	70	70M
Raw Unfinished	40	NA	Painted Copper	71	71M
Black	41	41M	Textured Black	72	72M
Forest Green	42	42M	Matte Black	73	73M
Bright Red	43	43M	Textured Architectural Bronze	76	76M
White	44	44M	Textured White	77	77M
Bright Blue	45	45M	Textured Silver	78	78M
Sunny Yellow	46	46M	PREMIUM FINISH	Premium Grade*	Marine Grade*
Aqua Green	47	47M	Textured Desert	80	80M
Galvanized	49	NA	Graystone	82	82M
Navy	50	50M	Oil Rubbed Bronze	83	83M
Architectural Bronze	51	51M	Carbon Graphite	96	96M
Patina Verde	52	52M			
Consult Factory for additional paint charges and availability.					

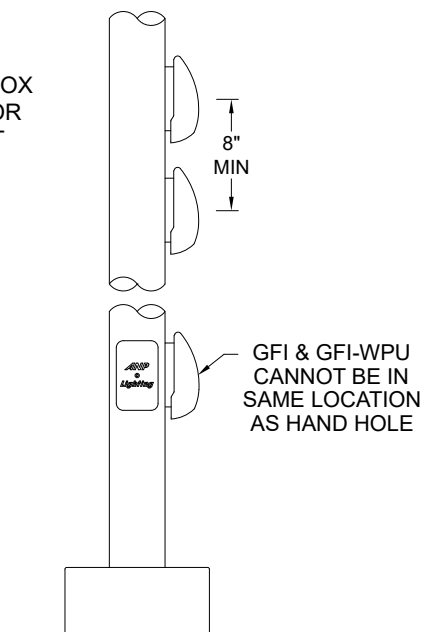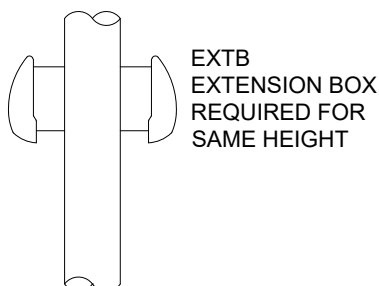

TOP	
*Must choose if ordering pole alone; leave blank if ordering luminaire or arm.	
OT (Open Top)	
OTPC (Open Top, includes flat Pole Cap)	
OM (Other Mounting (please define))	
TN (Ø2-3/8" x 4" Tenon)	

FINISHES

- A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion. 5-year warranty for aluminum products. 2-year warranty for steel products.
- Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3,000 hours of continuous salt spray, comes with a 2-year warranty and is available in either a textured or gloss surface.

WARRANTY

See www.ANPlighting.com for complete fixture warranty.

LED warranty information


- 5 year limited warranty*
- ANPlighting.com

FINISHES COLORS

STANDARD



PREMIUM



Project Name: _____

Pole Type: _____ Quantity: _____

Customer: _____

ACCESSORIES



BDC



SBDC



IBOLT



GFI20



GFI-WPU

ADDITIONAL ACCESSORIES



BAA



BAB



BAC



BSS



BSL



FPH-1



FPH-2



LR1



LR2



LR3



LR4



LR5



SIGN A



SIGN B



SIGN C



SIGN D

Project Name: _____

Pole Type: _____ Quantity: _____

Customer: _____

2-PIECE CLAMSHELLS

CCS0300



CCS0509



CCS0701



CCS0702



CCS0900



CCS1100



CCS1201



CCS1301



CCS1302



CCS1501



CCS1502



CCS1504



CCS1509



CCS1606



CCS1607



CCS1608



CCS1902



CCS2902



CCS2903



CCS5301



CCS5401



CCS5509



CCS6303



CCS6502



CCS9103



CCS9200