




CB0101

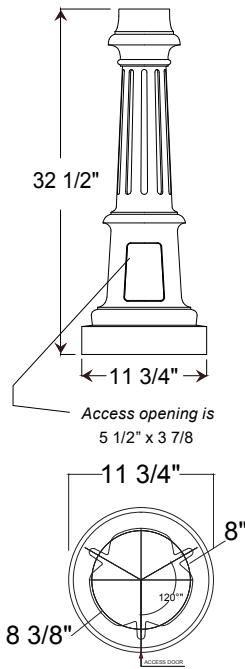

Weight: 26 lbs
Anchor Bolts: 3

Project: _____

Fixture Type: _____ Quantity: _____

Customer: _____

Specifications

Material:

All parts are durable 356 cast aluminum and high strength extruded aluminum.

Shafts are available in 3" and 4" diameter and wall thickness of .125 or .188.

All hardware provided shall be stainless steel or zinc plated steel.

Mounting:

Standard anchor bolts provided are 3/4" x 18" x 3". Bolts, nuts and washers shall be hot dipped galvanized steel.

Bolt pattern diameter is 8".

Access

Hand access opening and cover are provided in cast base. Hand hole cover is secured by two stainless steel machine screws. (Tamper-proof screws provided upon request). See drawing for position of hand hole.

8 3/8" bottom hole provided for conduit access.



C U L US

BAA

Grounding

All cast bases are provided with an aluminum grounding lug integrated to inner wall of shaft, 180 degrees to hand hole. Grounding lug is drilled and tapped to accommodate 1/4-20 stainless steel machine screw.

Pole Height

Maximum pole height is 16 feet.

Finish:

A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

Modifications:

Consult factory for custom or modified designs.

Catalog Logic

CB0101

Cast Base

4S16.188

Shaft

GFI20

Accessory

72

Finish

Catalog Number

1

CB0101

2

3

Additional heights and pole diameters may be available. Contact factory for your specific needs.

1 Smooth Shaft Catalog No.	1 Fluted Shaft Catalog No.	Shaft Diameter	Finished Height	Wall Thickness
3S6.125	3F6.125	3"	6'	.125
3S7.125	3F7.125	3"	7'	.125
3S8.125	3F8.125	3"	8'	.125
3S9.125	3F9.125	3"	9'	.125
3S10.125	3F10.125	3"	10'	.125
3S11.125	-	3"	11'	.125
3S12.125	-	3"	12'	.125
3S13.125	-	3"	13'	.125
3S14.125	-	3"	14'	.125
3S10.188	-	3"	10'	.188
3S11.188	-	3"	11'	.188
3S12.188	-	3"	12'	.188
3S13.188	-	3"	13'	.188
3S14.188	-	3"	14'	.188
4S8.125	-	4"	8'	.125
4S9.125	-	4"	9'	.125
4S10.125	-	4"	10'	.125
4S11.125	-	4"	11'	.125
4S12.125	-	4"	12'	.125
4S13.125	-	4"	13'	.125
4S14.125	-	4"	14'	.125
-	4F8.188	4"	8'	.188
-	4F9.188	4"	9'	.188
-	4F10.188	4"	10'	.188
-	4F11.188	4"	11'	.188
4S12.188	4F12.188	4"	12'	.188
4S13.188	4F13.188	4"	13'	.188
4S14.188	4F14.188	4"	14'	.188
4S15.188	4F15.188	4"	15'	.188
4S16.188	4F16.188	4"	16'	.188

2	ACCESSORIES
GFI15	(15 amp GFCI receptacle outlet)
GFI20	(20 amp GFCI receptacle outlet)
GFI-WPU	(20 amp GFCI receptacle with weather proof in-use cover)
BAA	(Cast Banner Arm A for 24" wide banner)
BAB	(Cast Banner Arm B for 30" wide banner)
BAC	(Cast Banner Arm C for 30" wide banner)
LR1	(Cast Ladder Rest 1)
LR3	(Cast Ladder Rest 3)
LR4	(Cast Ladder Rest 4)
LR5	(Cast Ladder Rest 5)
SIGN A	(Cast Sign A; 30" x 9", 8 letters/numbers on one line; requires Banner Arm to hang)
SIGN B	(Cast Sign B; 31" x 7", 12 letters/numbers on one line; requires Banner Arm to hang)
SIGN C	(Cast Sign C; 27" x 11", two rows of 8 letters/numbers on each line, requires Banner Arm to hang)
SIGN D	(Cast Sign D; 11" x 6 1/2", 4 letters/numbers on one line)
SIGN E	(Cast Sign E; comes with pole clamp, 24 1/2" x 6", 9 letters/numbers on one line)
FPH1	(Flag Pole Holder)
TP	(Tamper Proof Screws)

Project: _____

Fixture Type: _____ Quantity: _____

Customer: _____



3

FINISHES

Standard Grade	Marine Grade	Standard Grade	Marine Grade
40	NA Raw Unfinished	53	100 Copper Clay
41	101 Black	56	109 Silver
42	102 Forest Green	61	106 Black Verde
43	114 Bright Red	70	118 Painted Chrome
44	107 White	71	105 Painted Copper
45	112 Bright Blue	72	108 Textured Black
46	123 Sunny Yellow	73	125 Matte Black
47	120 Aqua Green	76	121 Textured Architectural Bronze
49	NA Galvanized	77	127 Textured White
50	111 Navy	78	124 Textured Silver
51	103 Architectural Bronze	10	130 Aspen Green
52	104 Patina Verde	11	131 Cantaloupe
12	133 Lilac	13	132 Putty

Consult factory for additional paint charges and availability