
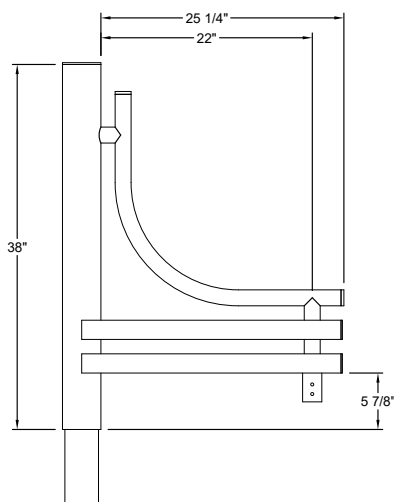


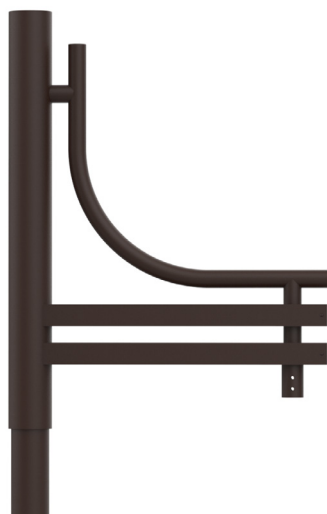

## PA352 - POST ARM

Extruded aluminum post arm for pendant luminaire.

|               | EPA  | Weight    |
|---------------|------|-----------|
| PA352-3-1-N-3 | 0.63 | 10.5 lbs. |
| PA352-3-1-N-4 | 0.70 | 11.0 lbs. |
| PA352-3-1-N-5 | 0.77 | 11.5 lbs. |
| PA352-3-1-N-6 | 0.84 | 12.0 lbs. |
| PA352-3-2-N-3 | 0.87 | 18.5 lbs. |
| PA352-3-2-N-4 | 0.94 | 19.0 lbs. |
| PA352-3-2-N-5 | 1.01 | 19.5 lbs. |
| PA352-3-2-N-6 | 1.08 | 20.0 lbs. |

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_



### Specifications

#### Material:

Durable A356 cast aluminum, 6061 extruded aluminum and sheet metal. Hardware is stainless steel or zinc plated steel.

#### Fixture Mounting:

Dual clevis pins to tenon which aid in hang-straight, plus two locking set screws.

#### Post Arm Mounting:

Reverse tenon with set screws in upper portion of pole.

Minimum wall thickness for corresponding pole is 0.188" (3/16") for aluminum and 0.1793 (7ga) for steel.

Slip-over available for any pole, consult factory. Pole section of arm matches pole diameter and style (smooth or fluted).

#### Electrical:

Post arms are prewired with 14ga line Voltage & 18ga dimming leads.

#### Finish:

A polyester powder coat high quality finish. Marine grade finish is available.

#### Modifications:

Consult factory for custom or modified designs.

#### Buy American:

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS, and DOT regulations. [Click here for additional information.](#)

### Catalog Logic

|                |              |                |              |               |            |           |
|----------------|--------------|----------------|--------------|---------------|------------|-----------|
| <b>PA352</b>   | <b>- 3 -</b> | <b>4 -</b>     | <b>N -</b>   | <b>3 -</b>    | <b>S -</b> | <b>72</b> |
| Post Arm Style | Pendant Post | Number of Arms | Center Mount | Pole Diameter | Pole Style | Finish    |

### Catalog Number

**PA352**

**1**

**3**

**2**

**3**

**N**

**4**


**5**

**6**


#### 1 Arm Configuration




#### 2 Arm Configuration



#### 3 Arm Configuration



#### 4 Arm Configuration



### 1 POST ARM ORIENTATION

**3** - Pendant

### 2 NUMBER OF ARMS

**1** - One Arm Configuration

**2** - Two Arm Configuration

**3** - Three Arm Configuration

**4** - Four Arm Configuration

### 3 CENTER MOUNT OPTIONS

**A** - Center Mount

**N** - No Center Mount

### 4 POLE DIAMETER

**3** - 3 Inch

**4** - 4 Inch

**5** - 5 Inch

**6** - 6 Inch (Smooth only)

### 5 POLE STYLE

**S** - Smooth

**F** - Fluted

### 6 FINISHES

\*Premium and Marine Grade Finish have additional charges

| Standard Colors      | Standard Grade | Marine Grade* | Standard Colors               | Standard Grade        | Marine Grade*        |
|----------------------|----------------|---------------|-------------------------------|-----------------------|----------------------|
| Aspen Green          | 10             | 10M           | Copper Clay                   | 53                    | 53M                  |
| Cantaloupe           | 11             | 11M           | Silver                        | 56                    | 56M                  |
| Lilac                | 12             | 12M           | Black Verde                   | 61                    | 61M                  |
| Putty                | 13             | 13M           | Painted Chrome                | 70                    | 70M                  |
| Raw Unfinished       | 40             | NA            | Painted Copper                | 71                    | 71M                  |
| Black                | 41             | 41M           | Textured Black                | 72                    | 72M                  |
| Forest Green         | 42             | 42M           | Matte Black                   | 73                    | 73M                  |
| Bright Red           | 43             | 43M           | Textured Architectural Bronze | 76                    | 76M                  |
| White                | 44             | 44M           | Textured White                | 77                    | 77M                  |
| Bright Blue          | 45             | 45M           | Textured Silver               | 78                    | 78M                  |
| Sunny Yellow         | 46             | 46M           | <b>PREMIUM FINISH</b>         | <b>Premium Grade*</b> | <b>Marine Grade*</b> |
| Aqua Green           | 47             | 47M           | Textured Desert               | 80                    | 80M                  |
| Galvanized           | 49             | NA            | Graystone                     | 82                    | 82M                  |
| Navy                 | 50             | 50M           | Oil Rubbed Bronze             | 83                    | 83M                  |
| Architectural Bronze | 51             | 51M           | Carbon Graphite               | 96                    | 96M                  |
| Patina Verde         | 52             | 52M           |                               |                       |                      |

Consult Factory for additional paint charges and availability.

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_




## FINISHES COLORS

## STANDARD



## PREMIUM



## FINISHES

- A polyester powder coat high quality finish is electro-statically applied and baked at 430°F for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.
- Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3,000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

## WARRANTY

See [www.ANPlighting.com](http://www.ANPlighting.com) for complete fixture warranty.

## LED warranty information

- 5 year limited warranty\*
- \*Limited Warranty: A typical year is defined as 4,380 hours of operation.