




Project: _____

Fixture Type: _____ Quantity: _____

Customer: _____

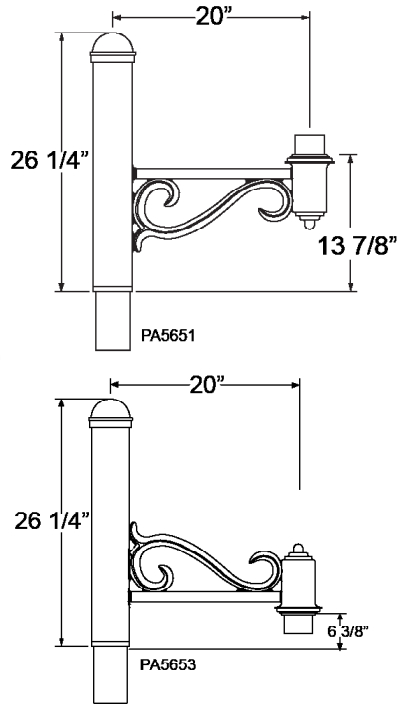

Weight: 15.0 lbs

EPA: 1.21

Specifications

General:

Due to size or weight, arms mounts may not accommodate all ANP luminaires.

Material:

All parts are durable 356 cast aluminum and high strength extruded aluminum. All hardware provided shall be stainless steel or zinc plated steel.

Fixture Mounting:

Post Cup mount to tenon. Pendant is Pin mount to tenon.

Post Arm Mounting:

Slip tenon to accommodate 3", 4" and 5" pole. Pole section of arm matches pole diameter and style.

Electrical:

Pull wire provided.

Finish:

A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

Modifications:

Consult factory for custom or modified designs.

PA565 - POST ARM

Extruded and Cast aluminum post arm for post or pendant fixture.

Catalog Logic

PA565 - 1 - 4 - A - 3 - S - 72

Post Arm
Style

Pendant
Post

Number
of Arms

Center
Mount

Pole
Diameter

Pole
Style

Finish
Style

Catalog Number

PA565

1

2

3

4


5

6


1 Arm Configuration




2 Arm Configuration



3 Arm Configuration



4 Arm Configuration



1 POST ARM ORIENTATION

- 1 - Post
- 3 - Pendant

3 CENTER MOUNT OPTIONS

- A - Center Mount
- N - No Center Mount

6 FINISHES

Standard Grade	Marine Grade	Standard Grade	Marine Grade
40	NA Raw Unfinished	53	100 Copper Clay
41	101 Black	56	109 Silver
42	102 Forest Green	61	106 Black Verde
43	114 Bright Red	70	118 Painted Chrome
44	107 White	71	105 Painted Copper
45	112 Bright Blue	72	108 Textured Black
46	123 Sunny Yellow	73	125 Matte Black
47	120 Aqua Green	76	121 Textured Architectural Bronze
49	NA Galvanized	77	127 Textured White
50	111 Navy	78	124 Textured Silver
51	103 Architectural Bronze	10	130 Aspen Green
52	104 Patina Verde	11	131 Cantaloupe
12	133 Lilac	13	132 Putty

2 NUMBER OF ARMS

- 1 - One Arm Configuration
- 2 - Two Arm Configuration
- 3 - Three Arm Configuration
- 4 - Four Arm Configuration

4 POLE DIAMETER

- 3 - 3 Inch
- 4 - 4 Inch
- 5 - 5 Inch

5 POLE STYLE

- S - Smooth
- F - Fluted

Project: _____

Fixture Type: _____ Quantity: _____


Customer: _____

**FINISHES**

- A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion. 5-year warranty for aluminum products. 2-year warranty for steel products.
- Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3,000 hours of continuous salt spray and is available in either a textured or gloss surface. 5-year warranty for aluminum products. 2-year warranty for steel products.

WARRANTYSee www.ANPlighting.com for complete fixture warranty.**LED warranty information**

- 5 year limited warranty*
- *Limited Warranty: A typical year is defined as 4,380 hours of operation.

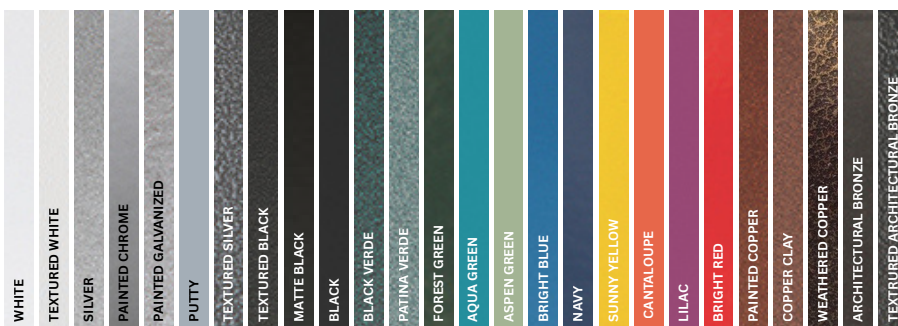FINISHES COLORS**STANDARD****PREMIUM**