

Project Name: _____

Pole Type: _____ Quantity: _____

Customer: _____

Specifications

Material:
ANP tapered poles vary greatly in taper and length. Please consult factory directly for all applications.

Bolt Covers:
1-piece Spun Aluminum Bolt Cover or 2-piece Split Aluminum Bolt Cover. 2-piece bolt covers are required if for use with GFI outlets and other accessories.

Banner Arms:
Multiple styles of Banner Arms are available. Please consult factory regarding maximum banner size based on the wind velocity in your location.

Other accessories:
GFI receptacles, ladder rests, signage, flagpole holder.

Finish:
A polyester powder coat high quality finish. Marine grade finish is available.

Modifications:
Consult factory for custom or modified designs.

Buy American:
This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS, and DOT regulations. [Click here for additional information.](#)

Catalog Logic

BD4-3TPS10.125 Pole - GFI Accessory - CCS1902 Clamshell - 41 Finish - OT Top

Catalog Number

1 2 3 4 5

BD4-3TPS10.125 — —

1	ITEM NUMBER	BASE OD	TOP OD	LENGTH	WALL	80 MPH	100 MPH
	BD4-3TPS10	4	3	10	0.125	10.40	6.10
	BD4-3TPS12	4	3	12	0.125	7.90	4.30
	BD4-3TPS14	4	3	14	0.125	5.80	2.70
	BD5-3TPS16	5	3	16	0.125	4.60	2.10
	BD5-3TPS18	5	3	18	0.125	2.90	1.30
	BD6-4.5TPS20	6	4.5	20	0.188	11.90	7.10
	BD6-4.5TPS25	6	4.5	25	0.188	6.90	3.80

2	ACCESSORIES
BDC3 (Bolt Down Cover 3")	
BDC4 (Bolt Down Cover 4")	
BDC5 (Bolt Down Cover 5")	
BDC6 (Bolt Down Cover 6")	
SBDC3 (Split Bolt Down Cover 3")	
SBDC4 (Split Bolt Down Cover 4")	
SBDC5 (Split Bolt Down Cover 5")	
SBDC6 (Split Bolt Down Cover 6")	
IBOLT (Eye Bolt)	
GFI20 (20 Amp GFCI Receptacle Outlet*)	
GFI-WPU (20 Amp GFCI Receptacle with Weather-proof while-in-use cover*)	
EXTB-3 Extension Box for GFI, 3" Pole	
EXTB-4 Extension Box for GFI, 4" Pole	
EXTB-5 Extension Box for GFI, 5" Pole	
EXTB-6 Extension Box for GFI, 6" Pole	
TP Tamper-Proof Screw (Handhole)	
VD2 2nd Mode Vibration Damper, Internally mounted	
*Please advise mounting height & orientation. Examples: @2'-6" & same side as hand hole (0°) @6'-6" & to the right of hand hole (90°) @2'-6" & to the rear of hand hole (180°) @2'-6" & to the left of hand hole (270°)	

3	2-PIECE CLAMSHELLS
CCS0300	
CCS0509	
CCS0701	
CCS0702	
CCS0900	
CCS1100	
CCS1201	
CCS1301	
CCS1302	
CCS1501	
CCS1502	
CCS1504	
CCS1509	
CCS1607	
CCS1608	
CCS1902	
CCS2902	
CCS2903	
CCS5301	
CCS5401	
CCS5509	
CCS6303	
CCS6502	
CCS9103	
CCS9200	

4	FINISHES					
	*Premium and Marine Grade Finish have additional charges					
	Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Marine Grade*
Aspen Green	10	10M	Copper Clay	53	53M	
Cantaloupe	11	11M	Silver	56	56M	
Lilac	12	12M	Black Verde	61	61M	
Putty	13	13M	Painted Chrome	70	70M	
Raw Unfinished	40	NA	Painted Copper	71	71M	
Black	41	41M	Textured Black	72	72M	
Forest Green	42	42M	Matte Black	73	73M	
Bright Red	43	43M	Textured Architectural Bronze	76	76M	
White	44	44M	Textured White	77	77M	
Bright Blue	45	45M	Textured Silver	78	78M	
Sunny Yellow	46	46M	PREMIUM FINISH	Premium Grade*	Marine Grade*	
Aqua Green	47	47M	Textured Desert	80	80M	
Galvanized	49	NA	Graystone	82	82M	
Navy	50	50M	Oil Rubbed Bronze	83	83M	
Architectural Bronze	51	51M	Carbon Graphite	96	96M	
Patina Verde	52	52M				


Consult Factory for additional paint charges and availability.

5	TOP
	*Must choose if ordering pole alone; leave blank if ordering luminaire or arm.
OT (Open Top)	
OTPC (Open Top, includes flat Pole Cap)	
OM (Other Mounting (please define))	
TN (Ø2-3/8" x 4" Tenon)	

Project Name: _____

Pole Type: _____ Quantity: _____

Customer: _____

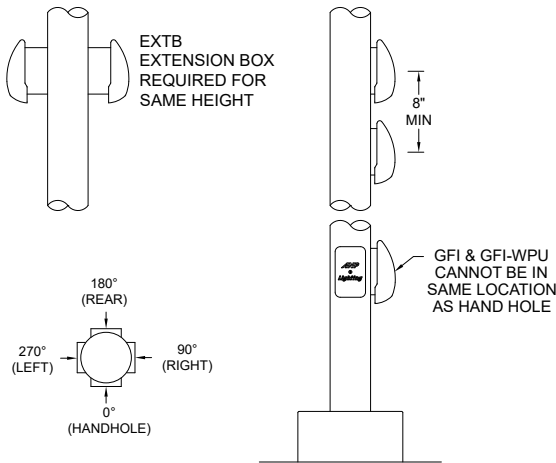

ACCESSORIES



BDC



SBDC



IBOLT



GFI20



GFI-WPU

FINISHES

- A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion. 5-year warranty for aluminum products. 2-year warranty for steel products.
- Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3,000 hours of continuous salt spray, comes with a 2-year warranty and is available in either a textured or gloss surface.

WARRANTY

See www.ANPlighting.com for complete fixture warranty.

LED warranty information


- 5 year limited warranty*
- ANPlighting.com

FINISHES COLORS

STANDARD



PREMIUM



Project Name: _____

Pole Type: _____ Quantity: _____

Customer: _____

ADDITIONAL ACCESSORIES



BAA



BAB



BAC



BSS



BSL



FPH-1



FPH-2



LR1



LR2



LR3



LR4



LR5



SIGN A



SIGN B



SIGN C



SIGN D

2-PIECE CLAMSHELLS



CCS0300



CCS0509



CCS0701



CCS0702



CCS0900



CCS1100



CCS1201



CCS1301



CCS1302



CCS1501



CCS1502



CCS1504



CCS1509



CCS1606



CCS1607



CCS1608



CCS1902



CCS2902



CCS2903



CCS5301



CCS5401



CCS5509



CCS6303



CCS6502



CCS9103



CCS9200