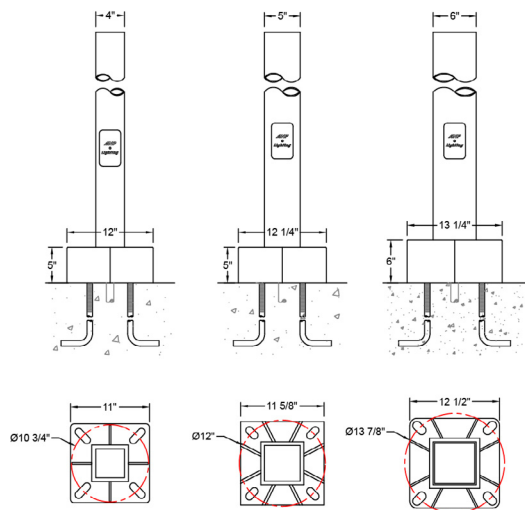




Specifications

Material:

Aluminum shaft is sharp corner, 6060-T6 extruded aluminum. Base plate is A356 cast aluminum.

Mounting:

Anchor bolts are hot-dipped galvanized steel, ASTM F1554 Grade 55. L-bolts are 3/4" x 18" long for most applications. See chart for 3/4" x 24" long L-bolt requirement. Bolt projection is 3" to 3-1/2"

Access:

All poles are provided with a hand hole and gasketed cover, 18" standard location. Tamper-proof screw is optional. 5/16-18 grounding lug located back side of hand hole.

Bolt Covers:

Choice of 1-piece or 2-piece Split Aluminum Bolt Cover. 2-piece bolt covers are required if for use with GFI outlets and other accessories.

Project Name: _____

Pole Type: _____ Quantity: _____

Customer: _____

Accessories:

GFI receptacles, Eye-bolts for festooning.

Finish:

A polyester powder coat high quality finish. Marine grade finish is available.

Modifications:

Consult factory for custom or modified designs.

Buy American:

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS, and DOT regulations. [Click here for additional information.](#)

Note: Do not pour anchor bolts per spec sheet. Some smaller clamshells require a custom base plate – consult factory.

Catalog Logic

BD4SQ8.125 GFI - 41
Pole Accessory Finish

Catalog Number

1

2

3

BD4SQ8.125

1	ITEM NUMBER	OD	LENGTH	WALL	80 MPH	90 MPH	100 MPH	110 MPH
	BD4SQ8	4	8	0.125	22.75	21.55	20.35	19.15
	BD4SQ9	4	9	0.125	16.45	15.25	14.05	12.85
	BD4SQ10	4	10	0.125	14.05	12.85	11.65	10.45
	BD4SQ11	4	11	0.125	10.75	9.55	8.35	7.15
	BD4SQ12	4	12	0.125	9.65	7.05	5.25	5.25
	BD4SQ13	4	13	0.125	6.55	4.65	3.25	3.25
	BD4SQ14	4	14	0.125	5.05	3.45	2.25	2.25
	BD4SQ15	4	15	0.125	5.05	3.45	2.25	2.25
	BD4SQ16	4	16	0.125	4.25	2.75	1.75	1.75
	BD4SQ17	4	17	0.125	4.25	2.75	1.75	1.75
	BD4SQ18	4	18	0.125	3.45	2.15	1.25	
	BD4SQ19	4	19	0.125	2.95	1.65		
	BD4SQ20	4	20	0.125	2.75			
	BD5SQ8	4	8	0.188	23.00	21.80	20.60	19.40
	BD5SQ9	4	9	0.188	16.70	15.50	14.30	13.10
	BD5SQ10	4	10	0.188	14.30	13.10	11.90	10.70
	BD5SQ11	4	11	0.188	11.00	9.80	8.60	7.40
	BD5SQ12	4	12	0.188	9.90	7.30	5.50	5.50
	BD5SQ13	4	13	0.188	6.80	4.90	3.50	3.50
	BD5SQ14	4	14	0.188	5.30	3.70	2.50	2.50
	BD5SQ15	4	15	0.188	5.30	3.70	2.50	2.50
	BD5SQ16	4	16	0.188	4.50	3.00	2.00	2.00
	BD5SQ17	4	17	0.188	4.50	3.00	2.00	2.00
	BD5SQ18	4	18	0.188	3.70	2.40	1.50	1.50
	BD5SQ19	4	19	0.188	3.20	1.90	1.00	
	BD5SQ20	4	20	0.188	3.00	1.70		
	BD5SQ8	5	8	0.125	23.50	22.30	21.10	19.90
	BD5SQ9	5	9	0.125	17.20	16.00	14.80	13.60
	BD5SQ10	5	10	0.125	14.80	13.60	12.40	11.20
	BD5SQ11	5	11	0.125	11.50	10.30	9.10	7.90
	BD5SQ12	5	12	0.125	10.40	7.80	6.00	6.00
	BD5SQ13	5	13	0.125	7.30	5.40	4.00	4.00
	BD5SQ14	5	14	0.125	5.80	4.20	3.00	3.00
	BD5SQ15	5	15	0.125	5.80	4.20	3.00	3.00
	BD5SQ16	5	16	0.125	5.00	3.50	2.50	2.50
	BD5SQ17	5	17	0.125	5.00	3.50	2.50	2.50
	BD5SQ18	5	18	0.125	4.20	2.90	2.00	2.00
	BD5SQ19	5	19	0.125	3.70	2.40	1.50	1.50
	BD5SQ20	5	20	0.125	3.50	2.20	1.30	

ITEM NUMBER	OD	LENGTH	WALL	80 MPH	90 MPH	100 MPH	110 MPH
BD5SQ8	5	8	0.188	24.00	22.80	21.60	20.40
BD5SQ9	5	9	0.188	17.70	16.50	15.30	14.10
BD5SQ10	5	10	0.188	15.30	14.10	12.90	11.70
BD5SQ11	5	11	0.188	12.00	10.80	9.60	8.40
BD5SQ12	5	12	0.188	10.90	8.30	6.50	6.50
BD5SQ13	5	13	0.188	7.80	5.90	4.50	4.50
BD5SQ14	5	14	0.188	6.30	4.70	3.50	3.50
BD5SQ15	5	15	0.188	6.30	4.70	3.50	3.50
BD5SQ16	5	16	0.188	5.50	4.00	3.00	3.00
BD5SQ17	5	17	0.188	5.50	4.00	3.00	3.00
BD5SQ18	5	18	0.188	4.70	3.40	2.50	2.50
BD5SQ19	5	19	0.188	4.20	2.90	2.00	2.00
BD5SQ20	5	20	0.188	4.00	2.70	1.80	1.80
BD6SQ8	6	8	0.125	24.50	23.30	22.10	20.90
BD6SQ9	6	9	0.125	18.20	17.00	15.80	14.60
BD6SQ10	6	10	0.125	15.80	14.60	13.40	12.20
BD6SQ11	6	11	0.125	12.50	11.30	10.10	8.90
BD6SQ12	6	12	0.125	11.40	8.80	7.00	7.00
BD6SQ13	6	13	0.125	8.30	6.40	5.00	5.00
BD6SQ14	6	14	0.125	6.80	5.20	4.00	4.00
BD6SQ15	6	15	0.125	6.80	5.20	4.00	4.00*
BD6SQ16	6	16	0.125	6.00	4.50	3.50*	3.50*
BD6SQ17	6	17	0.125	6.00	4.50*	3.50*	3.50*
BD6SQ18	6	18	0.125	5.20*	3.90*	3.00*	3.00*
BD6SQ19	6	19	0.125	4.70*	3.40*	2.50*	2.50*
BD6SQ20	6	20	0.125	4.50*	3.20*	2.30*	2.30*
BD6SQ8	6	8	0.188	25.50	24.30	23.10	21.90
BD6SQ9	6	9	0.188	19.20	18.00	16.80	15.60
BD6SQ10	6	10	0.188	16.80	15.60	14.40	13.20
BD6SQ11	6	11	0.188	13.50	12.30	11.10	9.90
BD6SQ12	6	12	0.188	12.40	9.80	8.00	8.00
BD6SQ13	6	13	0.188	9.30	7.40	6.00	6.00
BD6SQ14	6	14	0.188	7.80	6.20	5.00	5.00
BD6SQ15	6	15	0.188	7.80	6.20	5.00	5.00*
BD6SQ16	6	16	0.188	7.00	5.50	4.50*	4.50*
BD6SQ17	6	17	0.188	7.00	5.50*	4.50*	4.50*
BD6SQ18	6	18	0.188	6.20*	4.90*	4.00*	4.00*
BD6SQ19	6	19	0.188	5.70*	4.40*	3.50*	3.50*
BD6SQ20	6	20	0.188	5.50*	4.20*	3.30*	3.30*

*3/4" x 24" Anchor Bolts are required

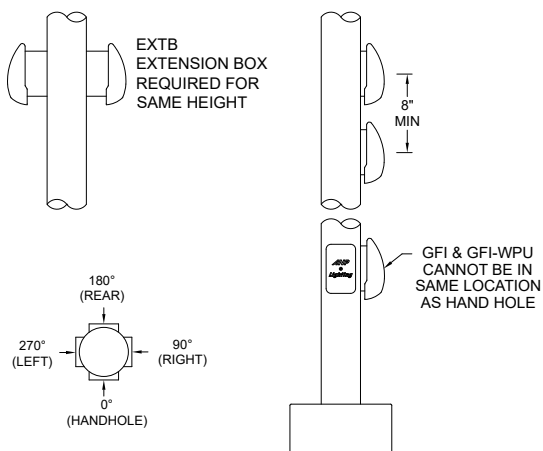
Project Name: _____

Pole Type: _____ Quantity: _____

Customer: _____

2 ACCESSORIES**SQBDC4-SQ** (Square Bolt Down Cover 4" Square Pole)**SQBDC5-SQ** (Square Bolt Down Cover 5" Square Pole)**SQBDC6-SQ** (Square Bolt Down Cover 6" Square Pole)**SSQBDC4-SQ** (Split Square Bolt Down Cover 4" Square Pole)**SSQBDC5-SQ** (Split Square Bolt Down Cover 5" Square Pole)**SSQBDC6-SQ** (Split Square Bolt Down Cover 6" Square Pole)**IBOLT** (Eye Bolt)**GFI20** (20 Amp GFCI Receptacle Outlet*)**GFI-WPU** (20 Amp GFCI Receptacle with Weather-proof while-in-use cover*)**EXTB-4SQ** (Extension Box for GFI, 4" Square Pole)**EXTB-5SQ** (Extension Box for GFI, 5" Square Pole)**EXTB-6SQ** (Extension Box for GFI, 6" Square Pole)**TP** Tamper-Proof Screw (Handhole)**VD2** 2nd Mode Vibration Damper, Internal mounted (Not for use with 3" Poles)

*Please advise mounting height & orientation. Examples:
 @2'-6" & same side as hand hole (0°)
 @6'-6" & to the right of hand hole (90°)
 @2'-6" & to the rear of hand hole (180°)
 @2'-6" & to the left of hand hole (270°)

**3 FINISHES**


*Premium and Marine Grade Finish have additional charges

Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Marine Grade*
Aspen Green	10	10M	Copper Clay	53	53M
Cantaloupe	11	11M	Silver	56	56M
Lilac	12	12M	Black Verde	61	61M
Putty	13	13M	Painted Chrome	70	70M
Raw Unfinished	40	NA	Painted Copper	71	71M
Black	41	41M	Textured Black	72	72M
Forest Green	42	42M	Matte Black	73	73M
Bright Red	43	43M	Textured Architectural Bronze	76	76M
White	44	44M	Textured White	77	77M
Bright Blue	45	45M	Textured Silver	78	78M
Sunny Yellow	46	46M	PREMIUM FINISH	Premium Grade*	Marine Grade*
Aqua Green	47	47M	Textured Desert	80	80M
Galvanized	49	NA	Graystone	82	82M
Navy	50	50M	Oil Rubbed Bronze	83	83M
Architectural Bronze	51	51M	Carbon Graphite	96	96M
Patina Verde	52	52M			

Consult Factory for additional paint charges and availability.

TOP

*Must choose if ordering pole alone; leave blank if ordering luminaire or arm.

OT (Open Top)**OTPC** (Open Top, includes flat Pole Cap)**OM** (Other Mounting (please define))**ACCESSORIES****SQBDC****SSQBDC****IBOLT****GFI20****GFI-WPU**

Project Name: _____

Pole Type: _____ Quantity: _____

Customer: _____

FINISHES

- A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion. 5-year warranty for aluminum products. 2-year warranty for steel products.
- Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3,000 hours of continuous salt spray, comes with a 2-year warranty and is available in either a textured or gloss surface.

WARRANTYSee www.ANPlighting.com for complete fixture warranty.

LED warranty information

- 5 year limited warranty*
- ANPlighting.com

FINISHES COLORS**STANDARD****PREMIUM**