

Specifications

Material:
All aluminum construction. Hardware is stainless steel or zinc-plated steel.

Lens:
PMMA Acrylic Performance Optic option plus choice of secondary polycarbonate lens.

Mounting:
Flush Mount to Ø4" 0.188" (3/16") Aluminum Pole or 0.1793" (7ga) Steel Pole.

Drivers:
Universal Voltage 120-277V is standard. 0-10V, TRIAC & ELV (1%) dimming is standard. (Refer to Driver Specification section for other specifications)

Dark Sky Friendly:
To maintain dark sky friendly compatibility: ≤ 3000K

Project Name: _____

Fixture Type: _____ Quantity: _____

Customer: _____

Electrical:
A lightning surge protective device is standard (20KA² Max/10KA² Nominal). Approximately 12" of pull wire extends from luminaire. All luminaires are prewired with 0-10V dimming leads.

Finish:
A polyester powder coat high quality finish. Marine grade finish is available.

Certifications:
UL Listed for outdoor, wet location.

Modifications:
Consult factory for custom or modified designs.

Buy American:
This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS, and DOT regulations. [Click here for additional information.](#)

SYP06 LED

EPA: 0.08
Weight: 1.0 lbs

Catalog Logic



Catalog Number	1	2	3	4	5	6	7
SYP06							

1 LIGHT SOURCE & WATTAGES
Backlit 6" Ring LED with Board-Level Optic
R10W6 (Ring LED, 10W, 6")
R20W6 (Ring LED, 20W, 6")
Backlit 6" Ring LED No Board-Level Optic
RN10W6 (Ring LED, No Optic, 10W, 6")
RN20W6 (Ring LED, No Optic, 20W, 6")

2 DISTRIBUTION
SY (Symmetric)

3 LENS
NL (No Lens, for Board-Level Optic only)
CL (Clear Polycarbonate)
HT (High-Transmission Frosted Polycarbonate)
WH (White Opal Polycarbonate)


4 CCT (COLOR TEMPERATURE)
27K (2700K)
30K (3000K)
35K (3500K)
40K (4000K)
AMB (590nm True Amber)
*Consult Factory for 5000K

5 MOUNTING SOURCE
FM3 (Flush Mount to Ø3" ANP Pole)
FM4 (Flush Mount to Ø4" ANP Pole)

6 ACCESSORIES
IBOLT (Eye Bolt)
EMG-LED10.7 (10.7W LED Emergency Driver, See Below For Compatibility)
EMG-LED17 (17W LED Emergency Driver, See Below For Compatibility)
HLMSPC-06 (On/Off Motion Sensor/Photocell, High/Low field-configurable; 15' - 30' Sensor Mounting Height)
HLMSPC-10 (On/Off Motion Sensor/Photocell, High/Low field-configurable; 8' - 15' Sensor Mounting Height)
PC (Button Photo Cell)
FAID (Field Adjustable Internal Dimmer)
FM30 (STYLO Flush-mount to Ø3" pole by others, includes driver assembly)
FM40 (STYLO Flush-mount to Ø4" pole by others, includes driver assembly)
*Accessory finish will match fixture finish.

7 FINISHES					
*Premium and Marine Grade Finish have additional charges					
Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Marine Grade*
Aspen Green	10	10M	Copper Clay	53	53M
Cantaloupe	11	11M	Silver	56	56M
Lilac	12	12M	Black Verde	61	61M
Putty	13	13M	Painted Chrome	70	70M
Weathered Copper	29	29M	Painted Copper	71	71M
Raw Unfinished	40	NA	Textured Black	72	72M
Black	41	41M	Matte Black	73	73M
Forest Green	42	42M	Textured Architectural Bronze	76	76M
Bright Red	43	43M	Textured White	77	77M
White	44	44M	Textured Silver	78	78M
Bright Blue	45	45M	PREMIUM FINISH	Premium Grade*	Marine Grade*
Sunny Yellow	46	46M	Textured Desert	80	80M
Aqua Green	47	47M	Graystone	82	82M
Galvanized	49	NA	Oil Rubbed Bronze	83	83M
Navy	50	50M	Carbon Graphite	96	96M
Architectural Bronze	51	51M			
Patina Verde	52	52M			

1' minimum distance required for mounting some accessories such as motion sensor.

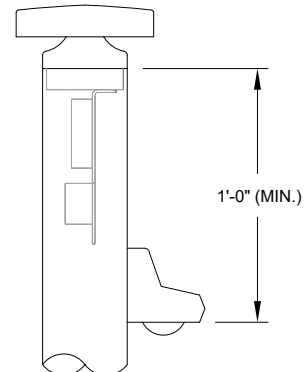

Project Name: _____

Fixture Type: _____ Quantity: _____

Customer: _____

LED SPECIFICATION
• Nichia NF2W757 Low-power LEDs
• Conformal Coated PCB
• CCT: 2700K, 3000K, 3500K, 4000K, 590nm True Amber
• CRI: >90, 3 SDCM
• Certifications: UL

DRIVER SPECIFICATION
• Universal Input: 120-277V
• Dimming: 0-10V, TRIAC, ELV (Dims to 1%)
• Power Factor @ Full Load >90%
• THD @ Full Load <20%
• Constant Current Output 50/60Hz
• Operating Temperature: -30°C Minimum
• Lifetime: >50,000 hours
• Ingress Protection: IP66
• Certifications: UL Recognized, CE

FINISHES
• A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion. 5-year warranty for aluminum products. 2-year warranty for steel products.
• Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3,000 hours of continuous salt spray and is available in either a textured or gloss surface. 5-year warranty for aluminum products. 2-year warranty for steel products.

WARRANTY
See www.ANPlighting.com for complete fixture warranty.
LED warranty information
• 5 year limited warranty*
• *Limited Warranty: A typical year is defined as 4,380 hours of operation.

ACCESSORIES



IBOLT



EMG-LED



PHOTOCELL



FAID

FINISHES COLORS

STANDARD
WHITE
TEXTURED WHITE
SILVER
PAINTED CHROME
PAINTED GALVANIZED
PUTTY
TEXTURED SILVER
TEXTURED BLACK
MATTE BLACK
BLACK
BLACK VERDE
PATINA VERDE
FOREST GREEN
AQUA GREEN
ASPEN GREEN
BRIGHT BLUE
NAVY
SUNNY YELLOW
CANTALOUPE
LILAC
BRIGHT RED
PAINTED COPPER
COPPER CLAY
WEATHERED COPPER
ARCHITECTURAL BRONZE
TEXTURED ARCHITECTURAL BRONZE

PREMIUM
EXTREME CHROME
TEXTURED DESERT STONE
BUTTERSCOTCH
CARAMEL
CANDY APPLE RED
COLBALT BLUE
GRAYSTONE
GUNMETAL GRAY
BLACK SILVER
OIL RUBBED BRONZE
CARBON GRAPHITE
ARCTIC SILVER
HIGH GLOSS BLACK
MAYAN GOLD