





Specifications



Project Name: _____

Size: _____ Quantity: _____

Customer: _____

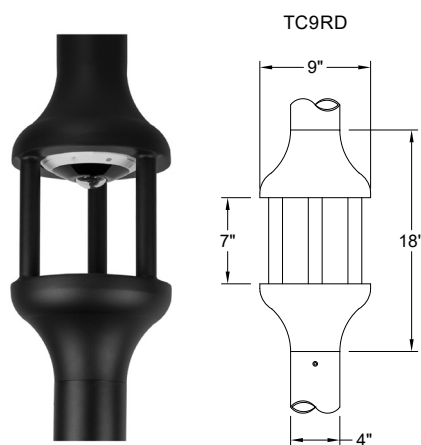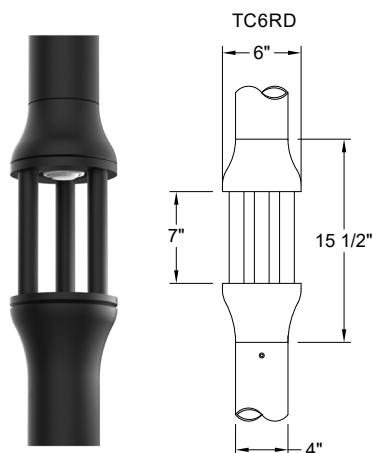**General:**

Technology Center is a patent-pending inline housing that supports many types of controls, sensors, and security cameras.

Mounting:

For use with aluminum poles only, except Pole Top version may be for use with steel poles. Required corresponding pole wall thickness is 0.188" (3/16") for aluminum and 0.1793 (7ga) for steel. Not for use under cantilevered loads such as post arms.

Material:

All 6061 aluminum. Hardware is stainless steel.

Finish:

A polyester powder coat high quality finish. Marine grade finish is available.

Modifications:

Consult factory for custom or modified designs.

Buy American:

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS, and DOT regulations. [Click here for additional information.](#)

TC
Technology Center

EPA:
TC6RD: 0.54
TC9RD: 0.64

Weight:
6.0 lbs.
8.0 lbs.

Catalog Logic

TC6RD IL 3ST - 4 - 04 - TLPC - 72
Size Center Style Number of Struts Pole Diameter Upper Shaft Length Technology Finish

Catalog Number	1	2	3	4	5	6	7

1	SIZE
TC6RD	(Technology Center, 6" Round)
TC9RD	(Technology Center, 9" Round)

2	STYLE
IL	- Inline
PT	- Pole Top

3	NUMBER OF STRUTS
3ST	(3-Strut)
4ST	(4-Strut)

4	POLE DIAMETER
Pole wall thickness must be 0.188" (3/16") for aluminum and 0.1793 (7ga) for steel	
4	- 4"
5	- 5"
6	- 6"

5	UPPER SHAFT LENGTH
00	- 0" (Pole Top Only)
04	- 4" (Minimum)
08	- 8"
12	- 12"
14	- 14"
18	- 18" (Maximum)


6	TECHNOLOGY
AXIS-M30	(AXIS M30 Dome Camera by others, requires TC9RD.)
HLMSPC-FM	(High/Low Motion Sensor Photocell, Flush Mount)
TLPC	(ANSI C136.41 Photocontrol & 120-277V Photocell)
TL5	(ANSI C136.41 5-Pin Photocontrol, Receptacle Only)
TL7	(ANSI C136.41 7-Pin Photocontrol, Receptacle Only)
OA	(Other Accessory, Please Define)

7	FINISHES					
*Premium and Marine Grade Finish have additional charges						
Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Marine Grade*	
Aspen Green	10	10M	Copper Clay	53	53M	
Cantaloupe	11	11M	Silver	56	56M	
Lilac	12	12M	Black Verde	61	61M	
Putty	13	13M	Painted Chrome	70	70M	
Weathered Copper	29	29M	Painted Copper	71	71M	
Raw Unfinished	40	NA	Textured Black	72	72M	
Black	41	41M	Matte Black	73	73M	
Forest Green	42	42M	Textured Architectural Bronze	76	76M	
Bright Red	43	43M	Textured White	77	77M	
White	44	44M	Textured Silver	78	78M	
Bright Blue	45	45M	PREMIUM FINISH	Premium Grade*	Marine Grade*	
Sunny Yellow	46	46M	Textured Desert	80	80M	
Aqua Green	47	47M	Graystone	82	82M	
Galvanized	49	NA	Oil Rubbed Bronze	83	83M	
Navy	50	50M	Carbon Graphite	96	96M	
Architectural Bronze	51	51M				
Patina Verde	52	52M				
Consult Factory for additional paint charges and availability.						

Project Name: _____

Size _____ Quantity: _____

Customer: _____

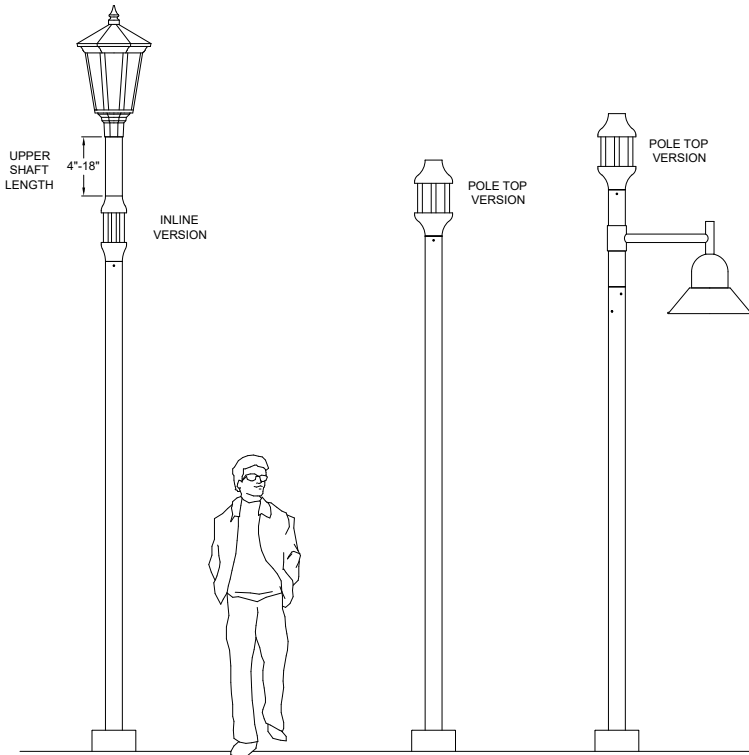

FINISHES

- A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion. 5-year warranty for aluminum products. 2-year warranty for steel products.
- Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3,000 hours of continuous salt spray and is available in either a textured or gloss surface. 5-year warranty for aluminum products. 2-year warranty for steel products.

TECHNOLOGIES (SOME BY OTHERS)



Motion Sensor / Photocell



TLPC



Security Camera




Wireless Controls



Wayfinding / Beacon Lights

FINISHES COLORS

STANDARD

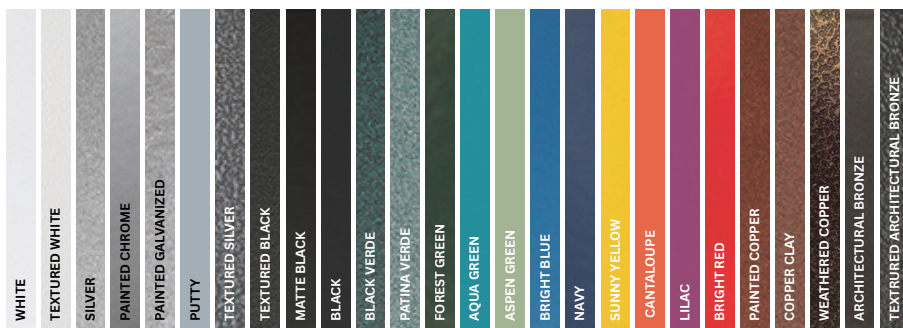

PREMIUM

