




CB1804

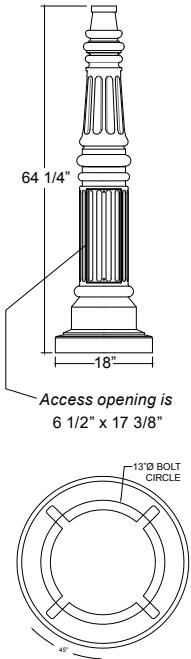

Weight: 89 lbs  
Anchor Bolts: 4

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_

## Specifications



## Material:

All parts are durable 356 cast aluminum and high strength extruded aluminum.

Shafts are available in 3" and 4" diameter and wall thickness of .125 or .188.

All hardware provided shall be stainless steel or zinc plated steel.

## Mounting:

Standard anchor bolts provided are 3/4" x 18" x 3". Bolts, nuts and washers shall be hot dipped galvanized steel.

Bolt pattern diameter is 13".

## Access

Hand access opening and cover are provided in cast base. Hand hole cover is secured by two stainless steel machine screws. (Tamper-proof screws provided upon request). See drawing for position of hand hole.

11" bottom hole provided for conduit access.

## Grounding

All cast bases are provided with an aluminum grounding lug integrated to inner wall of shaft, 180 degrees to hand hole. Grounding lug is drilled and tapped to accommodate 1/4-20 stainless steel machine screw.

## Pole Height

Maximum pole height is 16 feet.

## Finish:

A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

## Modifications:

Consult factory for custom or modified designs.

## Catalog Logic

CB1804

Cast Base

4S16.188

Shaft

GFI20

Accessory

72

Finish

## Catalog Number

1

CB1804

2

3

Additional heights and pole diameters may be available. Contact factory for your specific needs.

| 1 Smooth Shaft Catalog No. | 1 Fluted Shaft Catalog No. | Shaft Diameter | Finished Height | Wall Thickness |
|----------------------------|----------------------------|----------------|-----------------|----------------|
| 3S8.125                    | 3F8.125                    | 3"             | 8'              | .125           |
| 3S9.125                    | 3F9.125                    | 3"             | 9'              | .125           |
| 3S10.125                   | 3F10.125                   | 3"             | 10'             | .125           |
| 3S11.125                   | -                          | 3"             | 11'             | .125           |
| 3S12.125                   | -                          | 3"             | 12'             | .125           |
| -                          | -                          | -              | -               | -              |
| 3S12.188                   | -                          | 3"             | 12'             | .188           |
| 3S13.188                   | -                          | 3"             | 13'             | .188           |
| 3S14.188                   | -                          | 3"             | 14'             | .188           |
| -                          | -                          | -              | -               | -              |
| 4S10.125                   | -                          | 4"             | 10'             | .125           |
| 4S11.125                   | -                          | 4"             | 11'             | .125           |
| 4S12.125                   | -                          | 4"             | 12'             | .125           |
| 4S13.125                   | -                          | 4"             | 13'             | .125           |
| 4S14.125                   | -                          | 4"             | 14'             | .125           |
| 4S15.125                   | -                          | 4"             | 15'             | .125           |
| 4S16.125                   | -                          | 4"             | 16'             | .125           |
| -                          | -                          | -              | -               | -              |
| -                          | 4F10.188                   | 4"             | 10'             | .188           |
| -                          | 4F11.188                   | 4"             | 11'             | .188           |
| 4S12.188                   | 4F12.188                   | 4"             | 12'             | .188           |
| 4S13.188                   | 4F13.188                   | 4"             | 13'             | .188           |
| 4S14.188                   | 4F14.188                   | 4"             | 14'             | .188           |
| 4S15.188                   | 4F15.188                   | 4"             | 15'             | .188           |
| 4S16.188                   | 4F16.188                   | 4"             | 16'             | .188           |

## 2 ACCESSORIES

**GFI15** (15 amp GFCI receptacle outlet)



**GFI20** (20 amp GFCI receptacle outlet)

**GFI-WPU** (20 amp GFCI receptacle with weather proof in-use cover)

**BAA** (Cast Banner Arm A for 24" wide banner)




**BAB** (Cast Banner Arm B for 30" wide banner)



**BAC** (Cast Banner Arm C for 30" wide banner)




**LR1** (Cast Ladder Rest 1)



**LR3** (Cast Ladder Rest 3)



**LR4** (Cast Ladder Rest 4)



**LR5** (Cast Ladder Rest 5)



**SIGN A** (Cast Sign A; 30" x 9", 8 letters/numbers on one line; requires Banner Arm to hang)




**SIGN B** (Cast Sign B; 31" x 7", 12 letters/numbers on one line; requires Banner Arm to hang)



**SIGN C** (Cast Sign C; 27" x 11", two rows of 8 letters/numbers on each line, requires Banner Arm to hang)



**SIGN D** (Cast Sign D; 11" x 6 1/2", 4 letters/numbers on one line)



**SIGN E** (Cast Sign E; comes with pole clamp, 24 1/2" x 6", 9 letters/numbers on one line)



**FPH1** (Flag Pole Holder)



**TP** (Tamper Proof Screws)

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_



3

## FINISHES

| Standard Grade | Marine Grade | Standard Grade       | Marine Grade |     |                               |
|----------------|--------------|----------------------|--------------|-----|-------------------------------|
| 40             | NA           | Raw Unfinished       | 53           | 100 | Copper Clay                   |
| 41             | 101          | Black                | 56           | 109 | Silver                        |
| 42             | 102          | Forest Green         | 61           | 106 | Black Verde                   |
| 43             | 114          | Bright Red           | 70           | 118 | Painted Chrome                |
| 44             | 107          | White                | 71           | 105 | Painted Copper                |
| 45             | 112          | Bright Blue          | 72           | 108 | Textured Black                |
| 46             | 123          | Sunny Yellow         | 73           | 125 | Matte Black                   |
| 47             | 120          | Aqua Green           | 76           | 121 | Textured Architectural Bronze |
| 49             | NA           | Galvanized           | 77           | 127 | Textured White                |
| 50             | 111          | Navy                 | 78           | 124 | Textured Silver               |
| 51             | 103          | Architectural Bronze | 10           | 130 | Aspen Green                   |
| 52             | 104          | Patina Verde         | 11           | 131 | Cantaloupe                    |
| 12             | 133          | Lilac                | 13           | 132 | Putty                         |

Consult factory for additional paint charges and availability